


RICE TRAILERS

SINGLE AXLE UTILITY

G.V.W.R.	2,990#	AXLES	3,500# IDLER
G.A.W.R. (Ea. Axle)	3,500#	SUSPENSION	MULTI-LEAF SPRING
COUPLER	2" A FRAME COUPLER	TIRE	ST205/75R15
SAFETY CHAINS	1/4" GRD. 30 W/ SAFETY LATCH HOOK	WHEEL	15 X 5 BLACK MOD 5 BOLT
JACK	2K TOP WIND (BOLTED ON)	FLOOR	2" PINE
TONGUE	3" FORMED CHANNEL	LIGHTS	D.O.T. STOP, TAIL, TURN & CLEARANCE
TOP RAIL	2X2 ANGLE	ELEC. PLUG	4-WAY
FRAME	3X2 ANGLE	FINISH (Prep)	STEEL GRIT BLASTED, DEGREASED, PHOSPHATIZED, HOT WATER PRESSURE WASHED AND SEALED
CROSSMEMBERS	3" FORMED CHANNEL 16" ON CENTER	FINISH	FULLY POWDER COATED
UPRIGHTS	FORMED GUSSET STYLE		
FENDERS	9" X 32" ROLLED FORMED W/ BACK		

Standard Features

- 4' TUBE DROP GATE
- SET BACK JACK WITH JACK FOOT
- LOWER JACK SUPPORT PLATE
- GUSSET STYLE UPRIGHTS WITH INTEGRATED TIE LOOPS
- FLOOR SECURED W/ TORX SCREWS
- 3,500# CAMBERED AXLE
- GROMMET MOUNT SEALED LIGHTING
- FULLY SEALED WIRE HARNESS

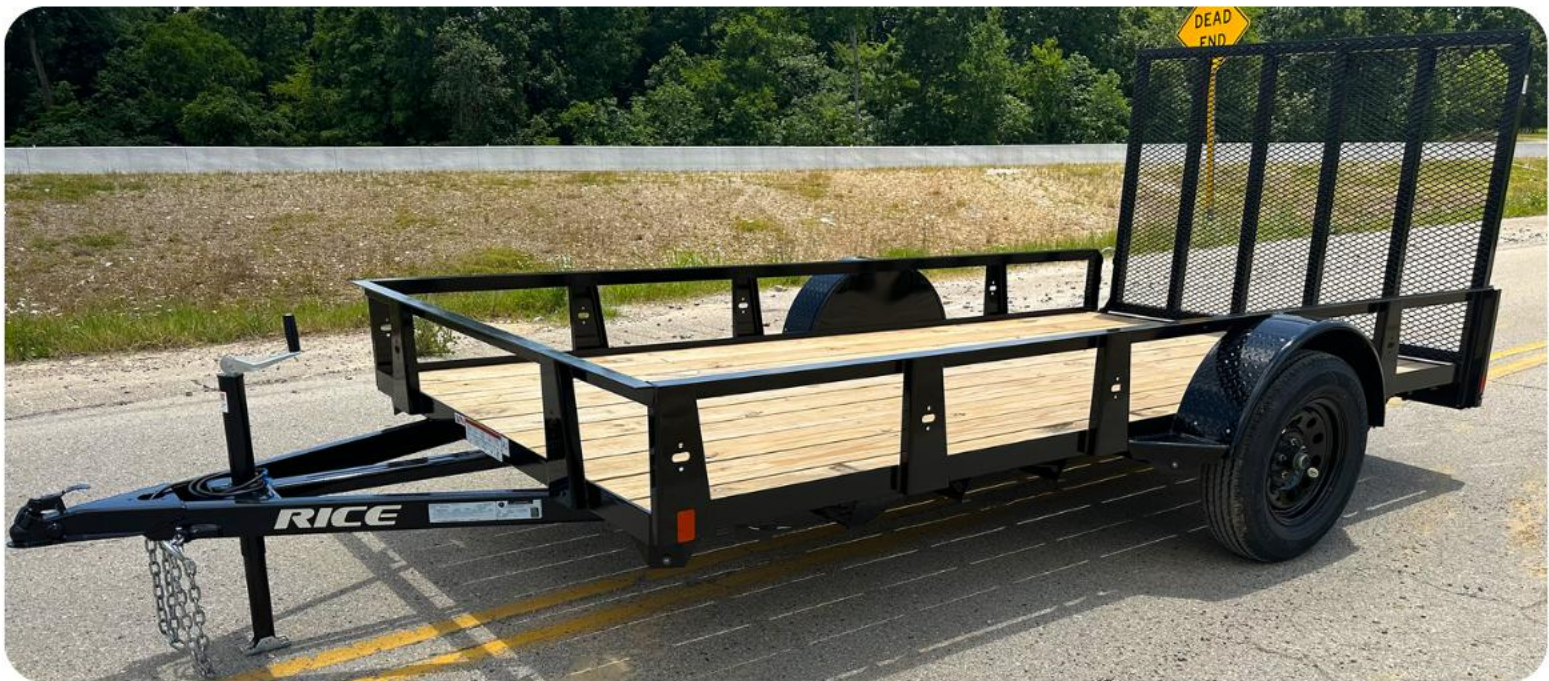

MODEL#	WEIGHT	DESCRIPTION
RS7610	1030	SINGLE AXLE UTILITY 76" WIDE 10' LONG
RS7612	1150	SINGLE AXLE UTILITY 76" WIDE 12' LONG
RS7614	1215	SINGLE AXLE UTILITY 76" WIDE 14' LONG
RS8210	1330	SINGLE AXLE UTILITY 82" WIDE 10' LONG
RS8212	1380	SINGLE AXLE UTILITY 82" WIDE 12' LONG
RS8214	1475	SINGLE AXLE UTILITY 82" WIDE 14' LONG

ALL WEIGHT MEASURED IN POUNDS